



Super Noise Lock[®] W65

ARCHITECTURAL HIGH PERFORMANCE
ACOUSTIC WINDOWS

iac-acoustics-thailand.com

Super Noise Lock[®] Windows

HIGH PERFORMANCE
WINDOWS TO SUIT A WIDE
RANGE OF APPLICATIONS

Standard Features



Acoustic
Rated

Optional Extras



Fire
Rated



Bullet
Resistance



Angled
Panes

Overview

- Certified acoustic performance rating
- Manufactured to standard and custom sizes
- Rugged all steel construction
- Finished in polyester powder coating as standard

Acoustic Rating

R_w (C; C_{tr}) 65 (-2; -6) dB to achieve minimum R'_w63dB once installed (subject to flanking). STC-65(dB) to achieve minimum NIC 63 once installed (subject to flanking).

Certified laboratory performance using standard 400mm (16") wall thickness arrangement as follows:

Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Full Octave Sound Transmission Loss (dB)	31	43	52	62	71	75	85	-

Overview

IAC Acoustics produces an engineered system — custom-designed in house to suit the required opening of any given project. Utilising precision laser cutting and state-of-the-art fabrication, all IAC Noise-Lock[®] windows are simple to assemble on site by our network of highly experienced installation crews.

IAC Noise-Lock[®] windows are laboratory tested for performance in both IAC's own R&D facilities and independent laboratories, further supported by installed site testing. IAC Acoustics is renowned for quality, durability and guarantees in field performance.


Design Features

IAC Noise-Lock[®] windows are available with a number of standard and custom design options. Please consult IAC Acoustics for availability of both standard and bespoke features such as angled panes, bullet resistant glass and EN 16 34-1 (EI) fire rated frames in various ratings from E30 to EI90. All IAC Noise-Lock[®] windows are built to order and site assembled using laminated safety glass as standard.

Performance Features

- Acoustically de-coupled high performance steel acoustic window
- Architecturally aesthetic steel capping frame with secret fixings as standard
- Custom-built to order with various options for:
 - angled panes
 - fire resistance
 - bullet resistance

- ① 6.4mm laminated safety glass
- ② 6.4mm laminated safety glass
- ③ Acoustic foam ③a Optional perforated reveal
- ④ Host wall
- ⑤ Neoprene acoustic seal
- ⑥ Painted steel capping frame
- ⑦ Acoustic foam retainer

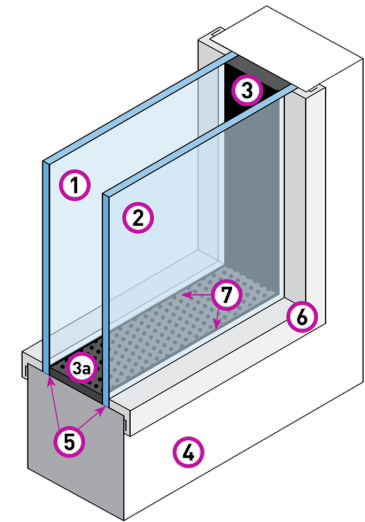

The relationship between the clear view and structural openings for both width and height is the same for all sizes of IAC Super Noise-Lock[®] W-65 windows. Measurements to consider can be seen in the table below..

	width	height
Structural Opening	X	Y
Clear View*	X - 66mm	Y - 66mm

* Clear view will decrease for fire rated frames, contact IAC Acoustics for details



IAC Acoustics Thailand Co., Ltd.

6/54-56, Thanon Poemsin Soi 42,

Ongern - Sai Mai Bangkok 10220 Thailand

Ph: (+66) 02-1012827 | Email: info@iac-acoustics-thailand.com

iac-acoustics-thailand.com

IAC has worldwide offices and manufacturing plants in the UK, Australia, Canada, China, Malaysia, Indonesia, Thailand, Philippines Denmark, France, Germany, Italy, Spain, UAE - Dubai, USA Houston, USA Lincoln, USA - New York.

